Seri / Series : T -GM....

45

46

47

TEKNİK ÖZELLİKLER

- **Gövde :** Pirinç (Ms 58)
- **Çekirdek :** Paslanmaz Çelik
- **Conta :** Viton
- **Kovan** : Pirinç (Ms 58) veya Alüminyum
- **Bağlantı :** R Dişli (DIN 2999, ISO R7)
- **Akışkan Sıcaklığı :** Viton (-10 / +160 °C),
- **Ortam Sıcaklığı :** (-20 / +40 °C)
- **Bobin Gücü :** 10 - 14 Watt
- **Soket Koruma Sınıfı :** IP 65
- **Bobin Gerilimi :** 12, 24,42, 48, 110, 220 AC/DC
- **Gerilim Toleransı :** ±%10 V AC/DC
- **Kullanıldığı Yerler :**
  - Damperli Kamyonlarda
  - Endüstriyel Mutfak ve Banyolarda
  - Özel Tip Uygulamalarda kullanılır.
  - Medikal Cihazlar

TECHNICAL FEATURES

- ***Body :*** *Brass (Ms 58)*
- ***Plunger :*** *Stainless Steel*
- ***Sealing :*** *Viton*
- ***Tube :*** *Brass (Ms 58) or Aluminum*
- ***Threaded :*** *R Screw (DIN 2999, ISO R7)*
- ***Medium Temperature:*** *Viton (-10 / +160 °C),*
- ***Ambient Temperature :*** *(-20 / +40 °C)*
- ***Power :*** *10 - 14 Watt*
- ***Connector Protection Class :*** *IP 65*
- ***Coil Voltage :*** *12, 24, 42, 48, 110, 220 AC/DC*
- ***Voltage Tolerance :*** *±%10 V AC/DC*
- ***Applications :***
  - *Dampers in Truck*
  - *Industrial Kitehens*
  - *Special Applications*
  - *Medical Instruments*

48

Model	Ölçü *Size*	Orifis *Orifice* (mm)	Kv (m^3/h)	Fark Basınç *Differential Pressure* min.(Bar)	max. (Bar)	Conta *Seal*	Resim *Picture*	Açıklama *Description*
T - GM 115. 1	G 1/8" -3/2	1.2	0.06	0	10	Viton	45	Üç Yollu, Tekli *3 -Way One Solenoid*
T - GM 115. 2		1.2	0.17				46	Üç Yollu, İkili *3 -Way Two Solenoid*
T - GM 115. 3		1.2	0.65				47	Üç Yollu, Üçlü *3 -Way Three Solenoid*
T - GM 115. 4		1.2	0.83				48	Üç Yollu, Dörtlü *3 -Way Four Solenoid*
T - GM 116. 1	G 1/4" -3/2	1.2	0.06	0	10	Viton	45	Üç Yollu, Tekli *3 -Way One Solenoid*
T - GM 116. 2		1.2	0.17				46	Üç Yollu, İkili *3 -Way Two Solenoid*
T - GM 116. 3		1.2	0.65				47	Üç Yollu, Üçlü *3 -Way Three Solenoid*
T - GM 116. 4		1.2	0.83				48	Üç Yollu, Dörtlü *3 -Way Four Solenoid*
T - GM 117. 1	G 1/8" -2/2	1-7	0.06	0	16	Viton	45	İki Yollu, Tekli *2 -Way One Solenoid*
T - GM 117. 2		1-7	0.17				46	İki Yollu, İkili *2 -Way Two Solenoid*
T - GM 117. 3		1-7	0.65				47	İki Yollu, Üçlü *2 -Way Three Solenoid*
T - GM 117. 4		1-7	0.83				48	İki Yollu, Dörtlü *2 -Way Four Solenoid*
T - GM 118. 1	G 1/4" -2/2	1-7	0.06	0	16	Viton	45	İki Yollu, Tekli *2 -Way One Solenoid*
T - GM 118. 2		1-7	0.17				46	İki Yollu, İkili *2 -Way Two Solenoid*
T - GM 118. 3		1-7	0.65				47	İki Yollu, Üçlü *2 -Way Three Solenoid*
T - GM 118. 4		1-7	0.83				48	İki Yollu, Dörtlü *2 -Way Four Solenoid*

Seri / Series : T -REZ

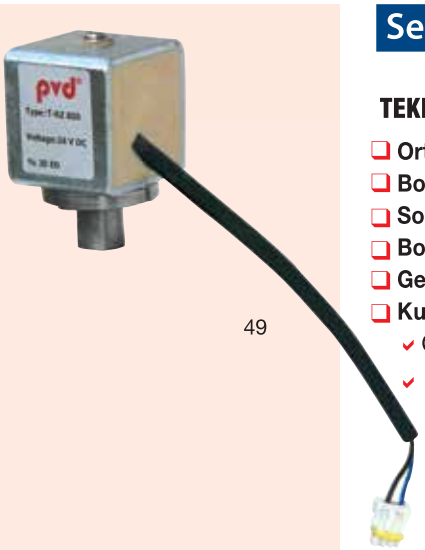

49

TEKNİK ÖZELLİKLER

- **Ortam Sıcaklığı :** (-20 / +40 °C)
- **Bobin Gücü :** 14 Watt
- **Soket Koruma Sınıfı :** IP 65
- **Bobin Gerilimi :** 24 V DC
- **Gerilim Toleransı :** ±%10
- **Kullanıldığı Yerler :**
  - Otomatik Rezervuarlarda
  - Otomatik Kilitleme vb.

TECHNICAL FEATURES

- ***Ambient Temperature :*** *(-20 / +40 °C)*
- ***Power :*** *14 Watt*
- ***Protection Class :*** *IP 65*
- ***Coil Voltage :*** *24 V DC*
- ***Voltage Tolerance :*** *±%10*
- ***Applications :***
  - *Automatic Reservoirs*
  - *Automatic Lockin*

Model	Bobin Gerilimi *Supply Voltage*	Strok / *Stroke* (mm)	Resim / *Picture*
T - REZ	24 V DC	15	49

50

Bobinler / *Coils*

TEKNİK ÖZELLİKLER

- **Ortam Sıcaklığı :** (-20 / +40 °C)
- **Güç :** 10 - 14 Watt
- **Soket Koruma Sınıfı :** IP 65
- **Gerilimler :** 12....220 V AC/DC
- **Tolerans :** ±%10

TECHNICAL FEATURES

- ***Ambient Temperature :*** *(-20 / +40 °C)*
- ***Power :*** *10 - 14 Watt*
- ***Connector Protection Class :*** *IP 65*
- ***Coil Voltage :*** *12...220 V AC/DC*
- ***Tolerance :*** *±%10*

51

52

Model	Açıklama / *Description*	Resim *Picture*
T - SB.1	Kare Bobin / *Square coil* 12-24-48 110- 220 VAC / DC	51
T - SB.3	Küçük Kare Bobin / *Small square coil* 12-24-220 VAC / DC	52
T - SK.1	Soket Küçük / *Small connector*	54
T - SK.1.1	Işıklı Soket Küçük / *Small connector*	
T - SK.2	Soket Büyük / *Large connector*	55
T - SK.2.1	Işıklı Soket Büyük / *Light Large connector*	
T - EX.1	Küçük Ex-proof Bobin / *Small Ex-proof coil*	50
T - EX.2	Büyük Ex-proof Bobin / *Large Ex-proof coil*	56

54

55

56

hava *air* | su *water* | CE

57

Kaynak makinası solenoid valfleri (CO^2 ve Argon gazı için)

Welding machine solenoid valves (for CO^2 and Argon gases)

58

3" Sulama sistemleri için büyük ölçü Solenoid Valfler

- **Gövde :** Dökme Demir (GG18 - GG22)
- **Diyafram :** Naylon takviyeli Nitril Kauçuk
- **Bağlantı :** R Dişli (DIN 2999, ISO R7)
- **Çalışma Basıncı :** (1 - 16 Bar)
- **Çalışma Sıcaklığı :** (Max. 50 °C)
- **Bobin Gücü :** 10 - 14 Watt
- **Soket Koruma Sınıfı :** IP 65
- **Bobin Gerilimi :** 12, 24,110, 220 V AC/DC
- **Gerilim Toleransı :** ±%10 V AC/DC
- **Normalde Kapalı (NC) veya Normalde Açık (NO)**
- **Kullanıldığı Yerler :**
  - Su

3"Large size Solenoid Valves for irrigation systems

- ***Body :*** *Cast Iron*
- ***Diaphragm :*** *Nylon Reinforced Nitril Rubber*
- ***Threaded :*** *R Screw (DIN 2999, ISO R7)*
- ***Working Pressure :*** *(1 - 16 Bar)*
- ***Working Temperature :*** *(Max. 50 °C)*
- ***Power :*** *10 - 14 Watt*
- ***Connector Protection Class :*** *IP 65*
- ***Coil Voltage :*** *12, 24, 110, 220 V AC/DC*
- ***Voltage Tolerance :*** *±%10 V AC/DC*
- ***Normally Closed (NC) or Normally Open (NO)***
- ***Applications:***
  - *Water*

59

Özel uygulamalar için PLEYT + Solenoid valf (0-130 bar.)

PLEYT + Solenoid valve for special applications (0-130 bar.)

60

Kapak Kilit Valfi / *Door Lock Valve*

- **Bobin Gerilimi :** 12, 24,110, 220 V AC/DC
- ***Coil Voltage :*** *12, 24, 110, 220 V AC/DC*